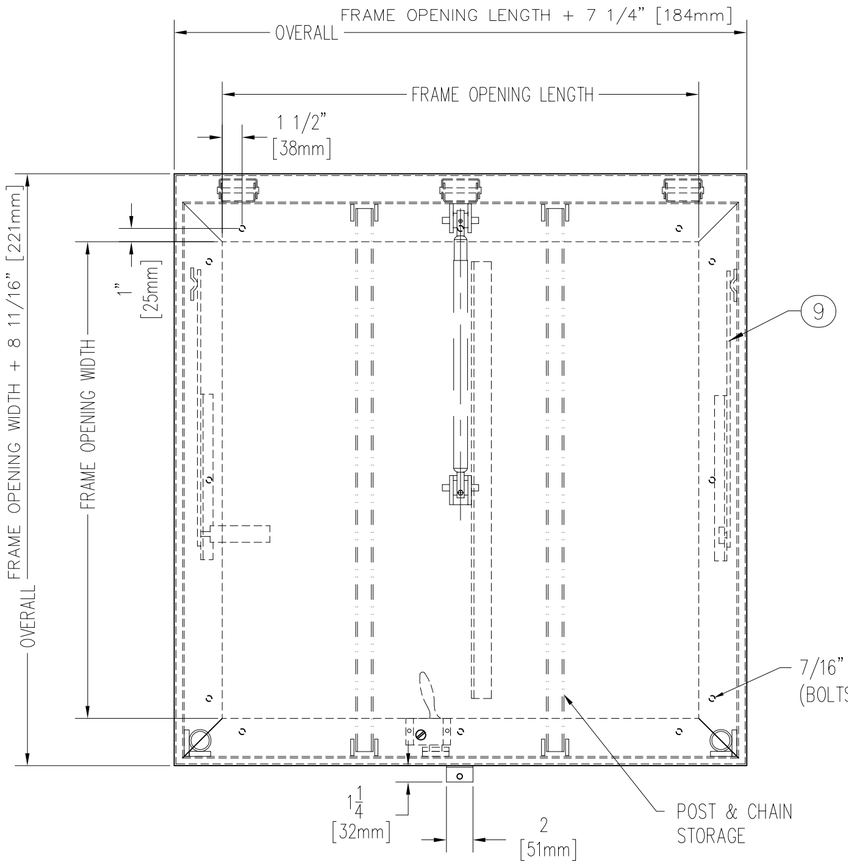

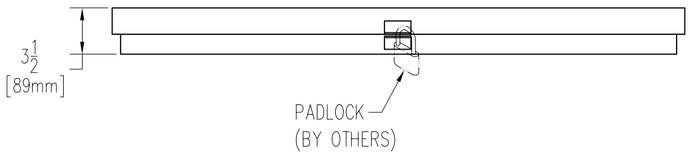

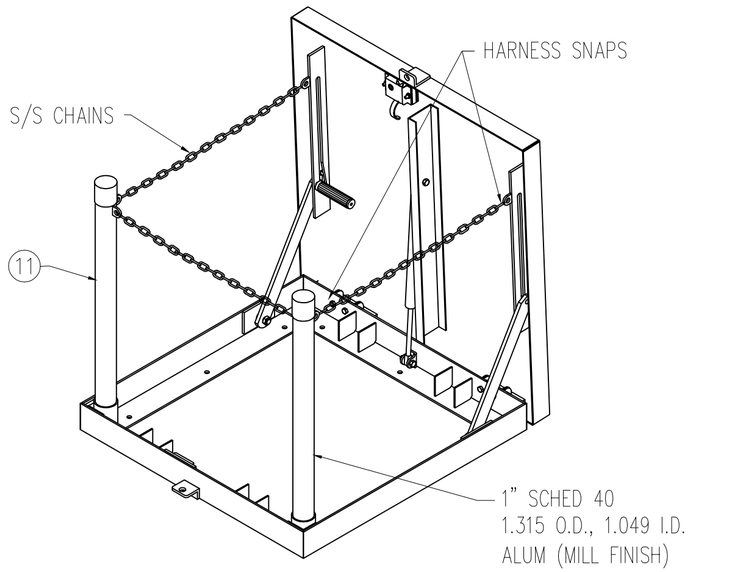

SHOWN WITH ALL OPTIONS

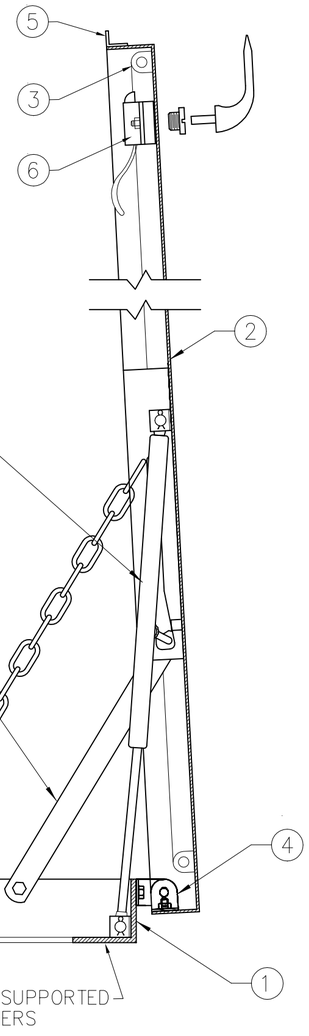

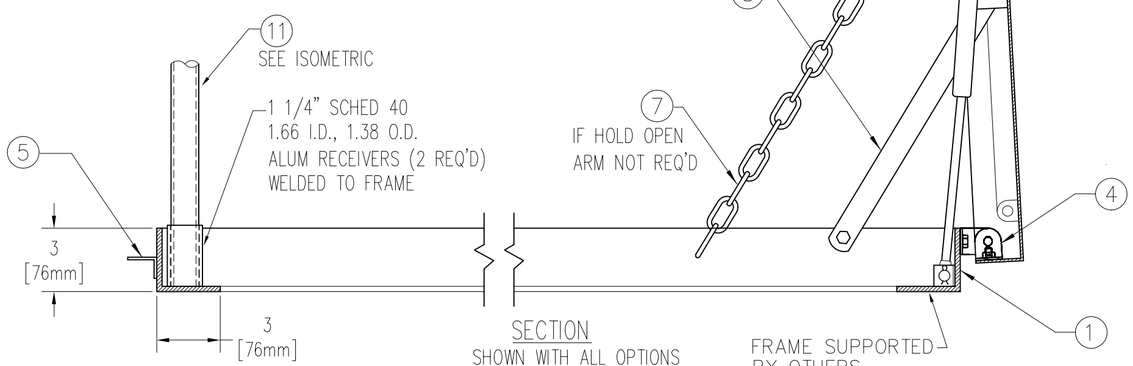

SECTION
SHOWN WITH ALL OPTIONS EXCEPT STIFFENER

SPECIFICATIONS

1. 3" x 3" x 1/4" aluminum angle frame.
2. 1/8" aluminum diamond plate cover.
3. Gasket (all around cover)
4. Pintle hinge (S/S)

OPTIONS

- ☐ 5. Padlock lugs (1/2" dia hole)
- ☐ 6. Slam lock w/ removable handle & cover plug
- ☐ 6a. Slam lock & padlock lugs
- ☐ 7. Hold open chain – opens to 95°
- ☐ 8. Hold open arm with red vinyl grip
- ☐ 9 Guide arm (if req'd)
- ☐ 10. Gas strut lifting mechanism (powder coated)
- ☐ 11. Posts & chains

NOTE:
HOLD OPEN ARMS AND GAS STRUT LIFTING MECHANISM WILL BE USED ON LARGER DOORS DUE TO SIZE AND COVER WEIGHT PER BILCO

SHOP FINISH:
ALUMINUM: MILL FINISH
HARDWARE: NON-CORROSIVE MATERIALS
(unless otherwise specified)

INSTALLER NOTES:

FOLLOW MANUFACTURES INSTALLATION INSTRUCTIONS, TO BE SUPPLIED WITH UNITS

Customer:

P.O. N°

Job:

Sales Rep:

Manufacturers of Doors for Special Services
THE BILCO COMPANY
New Haven, Connecticut 06505

SINGLE LEAF ACCESS DOOR

TYPE SM SIZE ___ x ___
WIDTH x LENGTH HINGE SIDE

QTY	TYPE	METAL
☐	SM	ALUM. COVER/ALUM. FRAME

FOR SIZE LIMITATIONS ON THIS UNIT, CONSULT FACTORY

THIS DRAWING IS THE PROPERTY OF THE BILCO COMPANY AND INCORPORATES INFORMATION WHICH IS PROPRIETARY. PUBLICATION AND/OR PUBLIC DISTRIBUTION IN WHOLE OR IN PART IS EXPRESSLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF THE BILCO COMPANY. THE INFORMATION CONTAINED HEREIN REMAINS THE PROPERTY OF THE BILCO COMPANY. ALL RIGHTS RESERVED.

© 08-10-05 THE BILCO COMPANY